


# ASTM Centrifuge Tubes, 100 ml

Type: cylindrical, conical bottom, length max. 203 mm

| Range             | Graduation [ml] | Subdivision [ml] | Error limit [± ml] |
|-------------------|-----------------|------------------|--------------------|
| <b>BLAUBRAND®</b> |                 |                  |                    |
| 0 - 0.1           |                 | 0.05             | 0.02               |
| > 0.1 - 0.3       |                 | 0.05             | 0.03               |
| > 0.3 - 0.5       |                 | 0.05             | 0.05               |
| > 0.5 - 1         |                 | 0.1              | 0.05               |
| > 1 - 2           |                 | 0.1              | 0.1                |
| > 2 - 3           |                 | 0.2              | 0.1                |
| > 3 - 5           |                 | 0.5              | 0.2                |
| > 5 - 10          |                 | 1                | 0.5                |
| > 10 - 25         |                 | 5                | 1                  |
| > 25 - 100        |                 | 25               | 1                  |

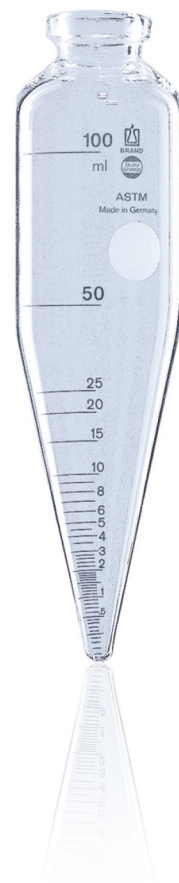

Type: cylindrical, conical bottom, length max. 167 mm

| Range             | Graduation [ml] | Subdivision [ml] | Error limit [± ml] |
|-------------------|-----------------|------------------|--------------------|
| <b>BLAUBRAND®</b> |                 |                  |                    |
| 0 - 0.1           |                 | 0.05             | 0.02               |
| > 0.1 - 0.3       |                 | 0.05             | 0.03               |
| > 0.3 - 0.5       |                 | 0.05             | 0.05               |
| > 0.5 - 1         |                 | 0.1              | 0.07               |
| > 1 - 1.5         |                 | 0.1              | 0.1                |
| > 1.5 - 2         |                 | 0.1              | 0.2                |
| > 2 - 3           |                 | 0.2              | 0.3                |
| > 3 - 5           |                 | 0.5              | 0.5                |
| > 5 - 10          |                 | 1                | 0.75               |
| > 10 - 25         |                 | 5                | 1                  |
| > 25 - 100        |                 | at 50 and 100    | 1.5                |

Type: pear-shaped, cylindrical bottom, length max. 160 mm

| Range             | Graduation [ml] | Subdivision [ml] | Error limit [± ml] |
|-------------------|-----------------|------------------|--------------------|
| <b>BLAUBRAND®</b> |                 |                  |                    |
| 0 - 1.5           |                 | 0.1              | 0.03               |
| > 1.5 - 3         |                 | 0.5              | 0.2                |
| > 3 - 5           |                 | 0.5              | 0.3                |
| > 5 - 10          |                 | 1                | 0.5                |
| > 10 - 25         |                 | 5                | 1                  |
| > 25 - 100        |                 | 25               | 2                  |